

**Cable Routing** 

## **Cable Routing**

MightyRods PRO	51
MightyScope	52
MightyRods	52
Cable Routing	54
Draw Tapes	54





## Next gen advanced technology

MightyRods PRO cable rods encompass a fusion of advanced technological features that deliver the ultimate in cable rod performance.

Improving on-the-job efficiency, MightyRods PRO cable rods get the job done.




## 100% SPLINTER PROOF RODS

SplinterSHIELD is an advancement in cable rod technology. The durable SplinterSHIELD coating fully encases the inner fibreglass rod to prevent harmful splintering.



## UNSURPASSED STRENGTH

Through the use of an innovative triple fixing system, the super tough zinc-plated steel Mighty-Fix connectors offer unsurpassed tensile strength in excess of 275kg. Furthermore, the ultra-slim profile reduces snagging and provides accessibility through smaller holes.

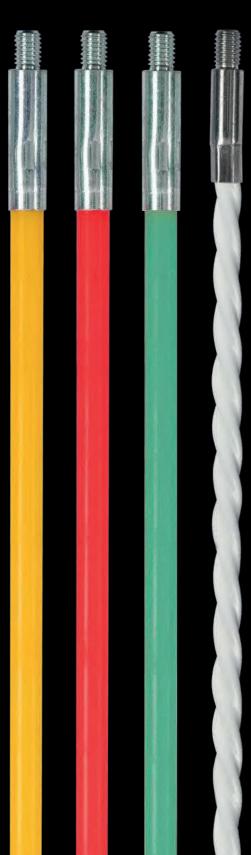






## MightyRods PRO 12m Super Set


12 meters of 100% splinter-proof rods. 4 rod flexibilities for overhead, under floor, tight angled and obstructed runs. Super flexible, low friction, Spira-FLEX rod for tight angled access points. Glow in the dark phosphorescent GLO rod for guiding a run of rods in low light conditions. Accessories: flexi-lead (miniflex), ring, hook, gender changer, flat bullet, domed bullet, in-line swivel, torch, magnet, chain. CONTENTS: 2 x 1m rods 7mmØ / 8 x 1m rods 6mmØ / 1 x Rod SpiraFLEX 4mmØ / 1 x rod GLO 6mmØ / 1 x FlexiLead / 1 x Hook / 1 x Flat Bullet / 1 x Domed Bullet / 1 x Magnet / 1 x Ring / 1 x Gender Changer / 1 x In-line Swivel / 1 x Torch / 1 x Chain.



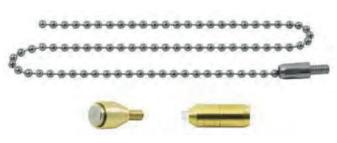

## MightyRods 3pc Accessory Pack

Upgrade your MightyRod kit with this Super Kit upgrade pack. CONTENTS: Torch, Magnet and Chain.

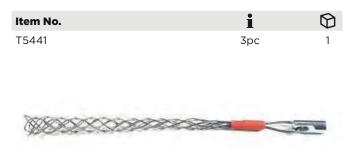

## MightyRods PRO Cable Socks

Tapered woven steel mesh cable sock that provides a quick and secure method for securing cables to rods.

Item No.	Ø	$\bigcirc$
T5442 06	6 - 10mm	6
T5442 11	11 - 15mm	6



## MightyRods PRO 10m Standard Set

10 meters of 100% splinter-proof rods. 4 rod flexibilities for overhead, under floor, tight angled and obstructed runs. Super flexible, low friction, Spira-FLEX rod for tight angled access points. Accessories: flexi lead (mini-flex), ring, hook, gender changer, flat bullet, domed bullet, in-line swivel. CONTENTS: 2 x 1m rods 7mmØ / 7 x 1m rods 6mmØ / 1 x Rod SpiraFLEX 4mmØ / 1 x FlexiLead / 1 x Hook / 1 x Flat Bullet / 1 x Domed Bullet / 1 x Ring / 1 x Gender Changer / 1 x In-line Swivel.

Item No.		$\bigcirc$
T5421	10 x 1m	1
	_	



## MightyRods PRO 5m Starter Set

5 meters of 100% splinter-proof rods. 2 rod flexibilities for overhead, under floor, tight angled and obstructed runs. Accessories: flexi lead (mini-flex), ring, hook. CONTENTS: 5 x 1m rods of 6mmØ / 1 x Flexi Lead / 1 x ring / 1 x Hook.

Item No.		$\bigcirc$
T5420	5 x 1m	1



## MightyRods PRO 3.3m Toolbox Set

Slimline connectors reduce snagging and provide accessibility through smaller holes. 33cm rods are ideal for tight access applications. Convenient sized set for storage in tool box or tool bag. CONTENTS: 10 x 330mm rods with 6 mm Ø / 1 x flexible rod 190mm / 1 x ring / 1 x hook / 5mm adaptor.

Item No.		$\bigcirc$
T5419	10 x 330mm	1





## MightyRods PRO 6mm Rods - 2 Pack

A pair of flexible 6mmØ rods ideal for most common routing needs.



## MightyRods PRO 7mm Rods - 2 Pack

A pair of more rigid 7mmØ rods ideal for overhead runs. They also provide greater control during straight cable runs.




## MightyRods PRO 6mm Rod - GLO

A flexible  $6 \text{mm} \varnothing$  rod, this phosphorescent GLO rod guides the way when routing in low light conditions.



## MightyRods PRO 4mm SpiraFLEX

This super flexible 4mmØ rod is the perfect solution when access is tight or when navigating around obstacles. The innovative helical profile and PET material reduces friction and minimises snagging.

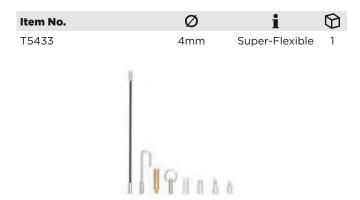

### MightyRods 7pc Accessory Pack

A full range of accessories from the MightyRod PRO Standard kit. CONTENTS: 1 x Flexi Lead, Hook, Ring, Gender Changer, Flat Bullet, Domed Bullet and In-line Swivel.

Item No.	i	$\Theta$
T5440	7pc	1

# MightyScope

## MightyScope Inspection Camera

The MightyScope comes with an onboard Wi-Fi hotspot that will stream in high resolution with a wireless range of up to 15m (50'). High resolution real time HD viewing with the ability to save photos and videos direct to your smart device gallery. The bright white LED's can be adjusted from the App to view in complete darkness when pushed into dark and confined spaces. This helps you investigate and diagnose problems. In the MightyScope App settings select to have the image view either normal view or always up. Digital zoom function - Digital zoom will give you a close up view from your MightyScope camera. Waterproof and dustproof - When the back cap is screwed on, the MightyScope is IP67 rated. Charge USB-C. From 0% - 100% battery charge in 100 minutes. Mode runtime - Light off: up to 110 minutes. Dimmed: up to 90 minutes. Full Beam: up to 70 minutes.

EN 55032:2015+A1 2020 EN 61000-3-2:2019+A1 2021 EN 61000-3-3:2013+A1 2019+A2 2021 EN55035:2017+A11:2020 EN301 489-1 V2,2,3 , EN301 489-17 V3,2,4 EN300 328-1 V2,2,2, EN50665:2017, EN IEC 62311:2020 EN IEC 62368-1-2020+A11 2020 EN IEC 62368-1:2020+A11:2020 Protection against Electric Shock - Class III

Item No.	<b>←</b> →→	رومی		$\bigcirc$
T5600	94mm x 24mm	15m	IP67	5

## **MightyRods**



## MightyRods 10m Cable Rods Set

10 meters of high sheen fibreglass and resin composite rods. Slimline connectors reduce snagging and provide accessibility through smaller holes. 5mmØ rods offer the optimal balance of rigidity and flexibility for the majority of cable routing requirements. CONTENTS: 10 x 1m rods, cable hook, 190mm coiled steel flexi lead, mini eye & ring, 5mm adaptor.

Item No.	<b>←</b> →→	Ø	$\bigcirc$
T5410	10 x 1m	5mm	3



## Wireless inspection camera

Featuring adjustable bright white LEDs, HD streaming, bnuilt in Wi-Fi hotspot - wireless and rechargeable, digital zoom function and a free and easy to use app.

Wireless inspection camera for the end user needing to inspect, photograph or record video in locations with limited access or visibility. Can be used with C.K MightyRods/PRO cable routing products.

- Visual Inspection
- Cable Installation
- Maintenance
- Repair Work
- Job Site Ready

## NEVER L@SE SIGHT







## MightyRods 3.3m Cable Rods Set

Conveniently sized set for storage in toolbox or tool bag. Ideal for tight access applications. Combined total length of 3.3m. 5mmØ rods offer the optimal blend if rigidity & flexibility. CONTENTS: 10 x 330mm rods, cable hook, 190mm coiled steel flexi lead, mini eye & ring, thread adaptor.



## **MightyRods Carry Case**

Durable polyester construction with reinforced base. Adjustable shoulder strap for convenient carrying. Two external pockets: Large pocket, capable of accommodating C.K MightyRods Toolbox cable rod set. Small pocket, to accommodate cable rod accessories.

Item No.		$\bigcirc$
T5450	1200mm	1

## **Cable Routing**



## **Gloworm Cable Router**

Ideal for running cables around tight corners, through insulation filled walls, underneath flooring and across ceilings. Natural curvature aids routing around short tight bends - can also be straightened out for straight line runs. Innovative glow in the dark phosphorescent polymer construction aids routing in low light conditions.

Item No.	· · · · · · · · · · · · · · · · · · ·	$\bigcirc$
T5460	4m	5

## **Draw Tapes**



## SpiraFLEX Draw Tapes

Innovative spiral design significantly reduces frictional resistance allowing for longer cable runs. Manufactured from an advanced polyethylene terephthalate (PET) material - super flexible and immensely tough. Considerably less kinking and coiling compared to nylon and steel tapes. Compatible with C.K MightyRod accessories. Supplied within a protective impact resistant rewindable cassette.

Item No.		Ø	$\bigcirc$
T5510	10m	4mm	3
T5520	20m	4mm	3
T5530	30m	4mm	3



## Steel Wire Draw Tape - 50m

Superior quality draw tape. Steel core wire for exceptional tensile strength. POM (Polyoxymethylene) coating for abrasion resistance and minimal friction when pulling cable. Flexible head attachment for navigating conduit with multiple bends.

Item No.		Ø	$\bigcirc$
495055	50m (164ft)	5.5mm	10





## POM Draw Tape - 30m

High quality draw tape constructed of three intertwining POM (Polyoxymethylene) strands. Helical tape structure for reduced friction and high tensile strength. Flexible head attachment for navigating conduit with multiple bends. Robust plastic casing for convenience during storage and transportation.



## **Nylon Draw Tapes**

Nylon draw tape for low friction and high strength during cable pulling applications. Flexible head attachment for navigating conduit with multiple bends. Red coloured tape for improved visibility in conduit with existing cables. Robust plastic casing for convenience during tape rewind, storage and transportation. Non-conductive properties for safe working practices.

Item No.	· · · · · · · · · · · · · · · · · · ·	Ø	$\bigcirc$
495050	10m (33ft)	4mm	5
495051	15m (49ft)	4mm	5
495052	20m (66ft)	4mm	5
495053	25m (82ft)	4mm	5
495054	30m (98ft)	4mm	5



## Draw Eye for Draw Tapes - 4mm

Draw Eye for pulling cable through conduit. For Draw Tapes with a diameter of 4mm.

Item No.	Ø	$\Theta$
495058	4mm	100



## Flexible Head and Draw Eye - 4mm

Item No.	Ø	$\bigcirc$
495057	4mm	100





## **Electricians Draw Tape Reel**

For pulling cables into conduit tubes. Special flexible spring steel for outstanding strength & reliability. Hooked end for smooth feed & minimal snagging. Housed in a heavy duty dispenser for convenient storage. Integral braking system for non-slip cable pull through.

Item No.	· · · · · · · · · · · · · · · · · · ·	$\bigcirc$
495008	15.2m (50ft)	1
1		

## **Electricians Draw Tape**

Lead spring guide for smooth feed & minimal snagging. Polymer tape for strength & reliability. Non-conductive & noncorroding for safety & long life.

Item No.	· 1+1+1+1+1+1+	$\bigcirc$
495005	10m	3
495006	20m	3
495007	30m	2



## **Draw Tape Lubricant**

Reduced friction whilst pulling cable through conduit. Formula: Water, Petroleum Wax, Stabilizer. Store at temperatures between 40-120°F / 4-48°C. Compatible with all common cable insulation materials. Creates a thin, non-conductive film that won't clog conduit. Odourless.

Item No.		$\bigcirc$
495059	950ml	12