



# ARN-410S

4CH NVR

FC |  | CE | EAC

## Key Features

- Up to 4CH, 8MP camera supported
- H.265, H.264, MJPEG codec
- 40Mbps network camera recording
- Plug & play by 4 PoE (LAN, 10/100), 1 RJ-45(WAN, 10/100)
- Supported HDD (Maximum 6TB)
- HDMI local monitor
- ARB supported
- P2P service (QR code connect) support

# ARN-410S

4CH NVR



## Specifications

### Display

Network camera	<b>Inputs</b>	Max. 4CH
	<b>Resolution</b>	8MP ~ CIF
	<b>Protocols</b>	SUNAPI, ONVIF
Decoding	<b>Local Display</b>	HDMI
	<b>Multi Screen Display</b>	[Local Monitor] 1/ 2V/ 2H/ 3V/ 4/ Sequence [Web] 1/ 2V/ 2H/ 3V/ 4
	<b>Resolution</b>	[Local Monitor] 8M(30fps), 1080p(120fps), 720P(120fps), D1(120fps)

### Performance

Operating System	<b>Embedded</b>	Linux
Record	<b>Compression</b>	H.265, H.264, MJPEG
	<b>Recording Bandwidth</b>	Max. 40Mbps
	<b>Resolution</b>	8MP ~ CIF
	<b>Mode</b>	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	<b>Event Trigger</b>	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event
	<b>Event Action</b>	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	<b>Playback Bandwidth</b>	Max. 32Mbps
	<b>User</b>	Max. 4 Users (Local 1, Remote 3)
	<b>Simultaneous playback</b>	Max. 16CH(Local 4CH, Remote 4CH per user)
	<b>Mode</b>	Date & Time(Calendar), Event list, Text Search, Smart Search
	<b>Resolution</b>	CIF ~ 8MP
	<b>Playback Control</b>	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	<b>Supported HDD</b>	Up to 6TB
	<b>HDD Slot</b>	SATA 1ea(Max. 6TB)
Backup	<b>File backup</b>	BU/Exe(GUI), JPG/AVI(Network)
	<b>Function</b>	Multi channel(Up to 4CH) Play, Date-Time/Title display

### Network

<b>Protocol</b>	IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
<b>DDNS</b>	Hanwha DDNS	
<b>Transmission Bandwidth</b>	Max. 40Mbps	
<b>Audio</b>	<b>Input/Output</b>	4 CH(network)
	<b>Compression</b>	G.711, G.726, AAC(16/48KHz)
	<b>Audio Communication</b>	2-Way
<b>Max Remote Users</b>	Search(3), Live Unicast(10), Multicast(20)	
<b>Security</b>	IP address filtering, User access Log, 802.1x, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware	
<b>Web viewer</b>	<b>Supported OS</b>	Windows 10, macOS 10.13
	<b>Supported browser</b>	Google Chrome, Microsoft Edge, Mac Safari
<b>Viewer Software</b>	WAVE, SSM, Webviewer, Wisenet Viewer, Wisenet mobile Support CGI(SUNAPI) for integration to 3'rd party VMS	

## Functions

Camera Setup	Register	Auto, Manual
	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSSR, Shutter, SSSR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer
	Preset	300 Presets
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live 4CH(Multi-Profile Support), Playback 4CH
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	Failover	N+1
	ARB	Support
Easy configuration		P2P(QR code)

## Interface

Front	Indicator	Power, Record, Network
Reset		Support
HDMI		1EA 3840x2160 30Hz
Ethernet		PoE RJ-45(LAN, 10/100) 4 ea ,RJ-45 1ea (WAN, 10/100)
USB		2EA(Front 1 x USB 2.0, Rear 1 x USB 2.0)
Power inlet		DC Adaptor

## System

Log	Log List	Max. 100,000 (System Log, Event Log each)
System Control		Mouse, Web
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese

## Environmental

Operating Temperature	0°C to +40°C(32°F to 104°F)
Operating Humidity	20% ~ 85% RH

## Electrical

Power Input	54VDC / 1.20A
Power Consumption	Max 52W (1HDD, PoE On)
PoE Budget	35W

## Mechanical

Color / Material	Black / Metal
Dimension (WxHxD)	W300.0 x H47 x D208.7mm (1U)
Weight	1.03Kg


# ARN-410S

4CH NVR



CAD

Unit: mm [inch]

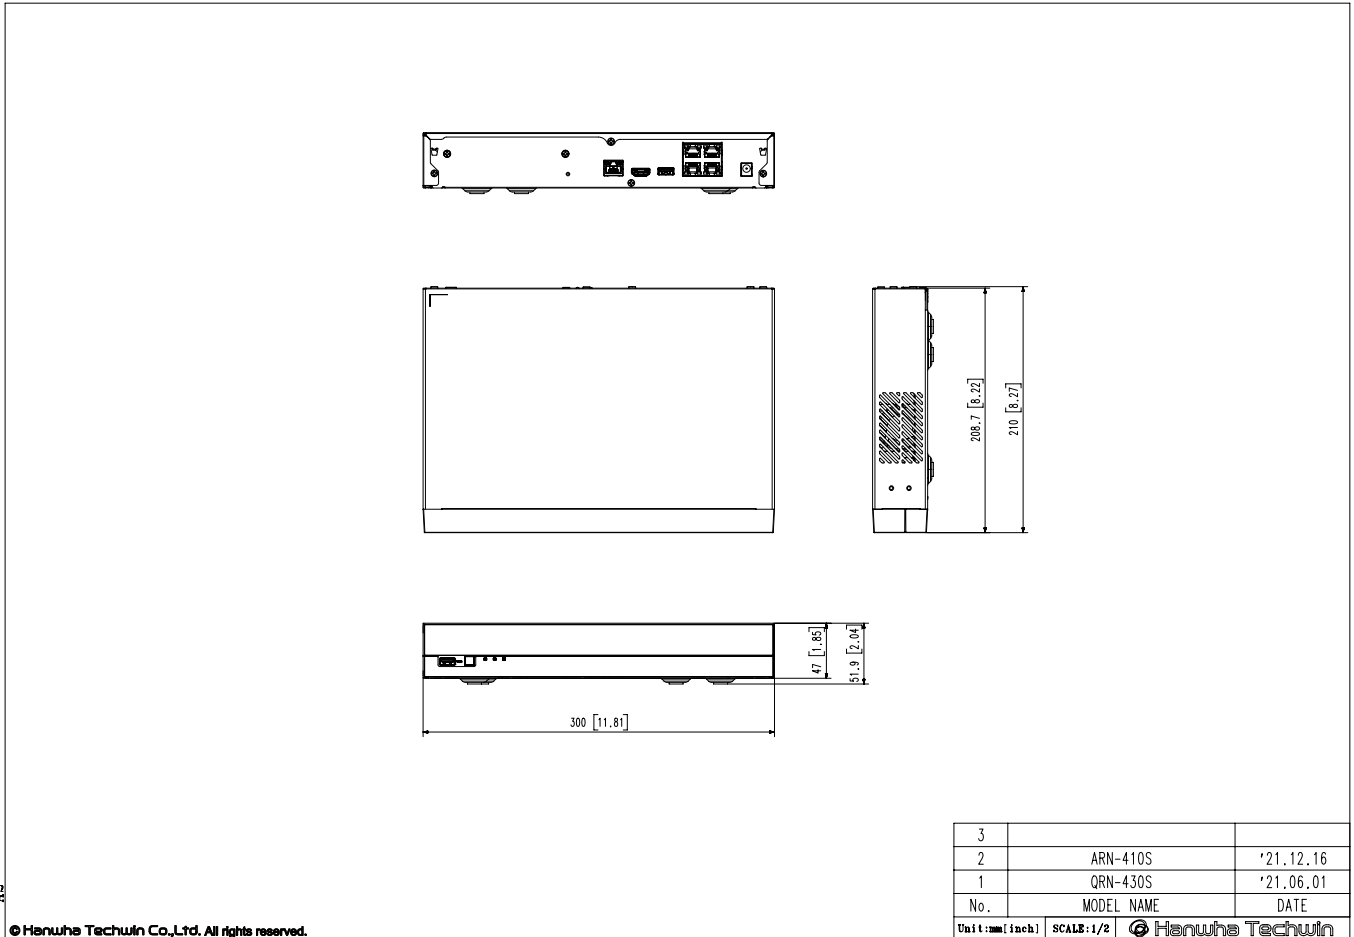

A2

© Hanwha Techwin Co., Ltd. All rights reserved.

**PR Support**  
 Benelyckevägen 11  
 44370 Gråbo  
 0768 444095  
[peer.rott@pr-support.se](mailto:peer.rott@pr-support.se)  
[www.pr-support.se](http://www.pr-support.se)

