



Network

Dome

# QND-8011

5M H.265 Dome Camera(Q mini)



## Key Features

- Max. 5Megapixel (2592 x 1944) resolution
- 2.8mm fixed lens
- 0.15Lux (Color), WDR (120dB)
- Max. 30fps@5MP (H.265 / H.264)
- H.265, H.264, MJPEG codec support, Multiple streaming
- Tampering, Motion detection, Defocus detection
- Micro SD / SDHC / SDXC memory slot (Max. 128GB)
- Hallway view, WiseStream II support
- LDC, PoE

## Compatible Accessories (Optional)




SBP-300WMW



SPG-IND16B




SBP-300MMW1



SBP-300KMW



SBP-300PMW



SBP-300BW



SBP-300CMW



SBP-300LMW



SBP-300NBW

# QND-8011

5M H.265 Dome Camera(Q mini)



## Specifications

### Video

Imaging Device	1/2.8" CMOS
Resolution	5MP mode : 2592x1944, 1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240 4MP mode : 2560x1440, 1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max. 15fps (@5MP Max. 2fps)
Min. Illumination	Color: 0.15Lux(F2.0, 1/30sec)
Video Out	micro HDMI: 1080p@30/25fps(60/50Hz)

### Lens

Focal Length (Zoom Ratio)	2.8mm fixed focal
Max. Aperture Ratio	F2.0
Angular Field of View	H: 104.4° / V: 76.7° / D: 136.1°
Focus Control	Fixed

### Pan / Tilt / Rotate

Pan / Tilt / Rotate Range	0~350 / 0~69 / 0~355
---------------------------	----------------------

### Operational

Camera Title	Displayed up to 85 characters
Day & Night	Auto(Electrical)
Backlight Compensation	BLC, WDR, SSSR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR
Motion Detection	4ea, polygonal zones
Privacy Masking	6ea, rectangular zones
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1/5~1/12,000sec)
Video Rotation	Flip, Mirror, Hallway view(90/270)
Analytics	Defocus detection, Motion detection, Tampering
Business Intelligence	People counting
Alarm Triggers	Analytics, Network disconnect
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC or NAS recording at event triggers

### Network

Ethernet	RJ-45(10/100BASE-T)
Video Compression	H.265/H.264: Main/High, MJPEG
Smart Codec	WiseStream II
Bitrate Control	H.264/H.265: CBR or VBR MJPEG: VBR

<b>Streaming</b>	Unicast(6 users) / Multicast Multiple streaming(Up to 3 profiles)
<b>Protocol</b>	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour, LLDP
<b>Security</b>	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP)
<b>Application Programming Interface</b>	ONVIF Profile S/G/T SUNAPI(HTTP API) Wisenet open platform

## General

<b>Webpage Language</b>	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch
<b>Edge Storage</b>	Micro SD/SDHC/SDXC 1slot 128GB
<b>Memory</b>	512MB RAM, 256MB Flash

## Environmental & Electrical

<b>Operating Temperature / Humidity</b>	-10°C ~ +40°C(-14°F ~ +104°F) / 0~90% RH
<b>Storage Temperature / Humidity</b>	-30°C ~ +60°C(-22°F ~ +140°F) / 0~ 90% RH
<b>Certification</b>	IP42, IK08
<b>Input Voltage</b>	PoE(IEEE802.3af, Class2)
<b>Power Consumption</b>	PoE: Max 5.00W, typical 4.00W

## Mechanical

<b>Color / Material</b>	White / Plastic
<b>RAL Code</b>	RAL9003
<b>Product Dimensions / Weight</b>	Ø99.0x56.0mm(Ø3.9x2.2"), 165g(0.36 lb)
<b>Hanging Mount (Dome)</b>	SBP-099HMM

## DORI (EN62676-4 standard)

<b>Detect (25PPM/ 8PPF)</b>	40.2m(12.26ft)
<b>Observe (63PPM/ 19PPF)</b>	16.1m(4.90ft)
<b>Recognize (125PPM/ 38PPF)</b>	8.0m(2.45ft)
<b>Identify (250PPM/ 76PPF)</b>	4.0m(1.23ft)


# QND-8011

5M H.265 Dome Camera(Q mini)



CAD

Unit: mm [inch]

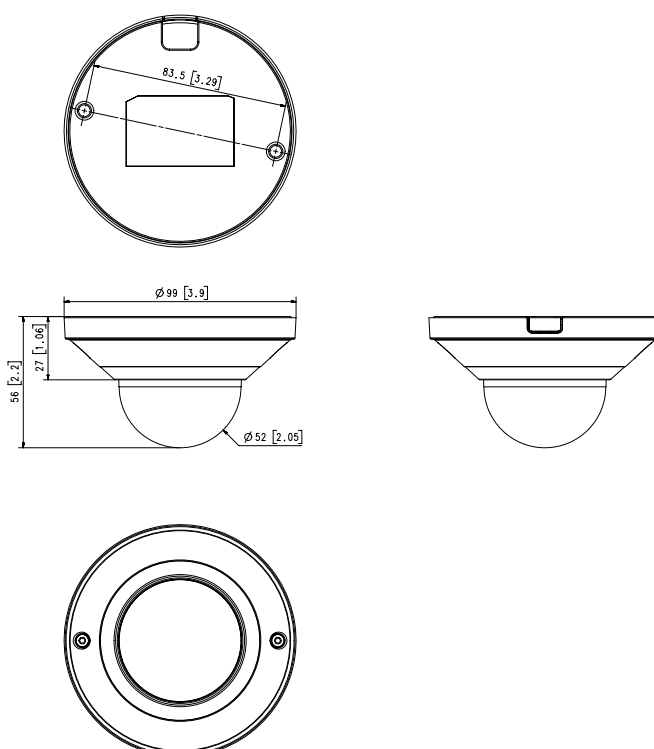

milimeter (inch)

**PR Support**  
Benelyckevägen 11  
44370 Gråbo  
0768 444095  
[peer.rott@pr-support.se](mailto:peer.rott@pr-support.se)  
[www.pr-support.se](http://www.pr-support.se)

